

MARELUCE
courtesy light

nora-r



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	110°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-R	40mm 28mm 27mm

Options	Controls

nora-s



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	110°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-S	40mm 28mm 27mm

Options	Controls

nora-r2



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	2x110°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-R2	40mm 28mm 27mm

Options	Controls

nora-s2




Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	2x110°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-S2	40mm 28mm 27mm

Options	Controls

nora-r4

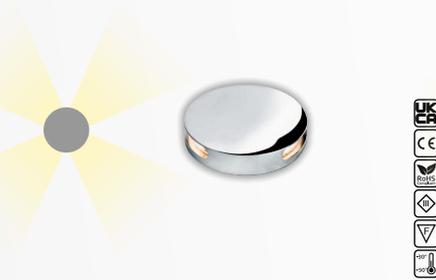

Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	4x60°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-R4	40mm 28mm 27mm

Options	Controls

nora-s4



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	4x60°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-S4	40mm 28mm 27mm

Options	Controls

nora-r2L



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	15° - 110°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-R2L	40mm 28mm 27mm

Options	Controls

nora-s2L



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	15° - 110°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-S2L	40mm 28mm 27mm

Options	Controls

nora-r2V



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	2x60°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions	
Model	a b c
Nora-R2V	40mm 28mm 27mm

Options	Controls

rigel-r



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44

Dimensions



Model	a	b	c
Rigel-R	30mm	20mm	30mm

Options Controls



rigel-s



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44

Dimensions



Model	a	b	c
Rigel-S	30mm	20mm	30mm

Options Controls



carna-r



Technical Data	
Power	1W
Voltage Supply	3-32VDC (Driver Ext.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	Wide
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44

Dimensions



Model	a	b	c
Carna-R	20mm	12mm	20mm

Options Controls



carna-s



Technical Data	
Power	1W
Voltage Supply	3-32VDC (Driver Ext.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	Wide
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44

Dimensions



Model	a	b	c
Carna-S	20mm	12mm	20mm

Options Controls



vega-r



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44

Dimensions



Model	a	b	c
Vega-R	30mm	20mm	30mm

Options Controls



vega-s



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44

Dimensions



Model	a	b	c
Vega-S	30mm	20mm	30mm

Options Controls




vera-r



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions



Model	a	b	c
Vera-R-IP44	40mm	30mm	14mm
Vera-R-IP66	40mm	30mm	40mm

Options Controls




vera-s



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions



Model	a	b	c
Vera-S-IP44	40mm	30mm	14mm
Vera-S-IP66	40mm	30mm	40mm

Options Controls




mira



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions



Model	a	b
Mira-IP44	40mm	14mm
Mira-IP66	40mm	40mm

Options Controls




star-r



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	Acrylic
Body Finishes	White
IP Class	44-66

Dimensions



Model	a	b	c
Star-R-IP44	40mm	30mm	14mm
Star-R-IP67	40mm	30mm	40mm

Options Controls




star-s



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	Acrylic
Body Finishes	White
IP Class	44-66

Dimensions



Model	a	b	c
Star-S-IP44	40mm	30mm	14mm
Star-S-IP66	40mm	30mm	40mm

Options Controls




kona



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions



Model	a	b	c
Kona-IP44	40mm	30mm	14mm
Kona-IP66	40mm	30mm	40mm

Options Controls




tina



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions



Model	a	b	c
Tina-IP44	45mm	30mm	14mm
Tina-IP67	45mm	30mm	40mm

Options Controls




titan



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions



Model	a	b	c
Titan-IP44	40mm	30mm	14mm
Titan-IP66	40mm	30mm	40mm

Options Controls




terra



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions



Model	a	b	c
Terra-IP44	40mm	30mm	14mm
Terra-IP66	40mm	30mm	40mm

Options Controls




lora



Technical Data	
Power	2W
Voltage Supply	3-32VDC (Driver Inc.)
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K
Luminous Flux	125lm/Watt (Max.)
Light Source	High Power Led / CRI>80
Beam	45°
Body Material	SS 316L - Aluminum
Body Finishes	PSS-SSS-G-MBR-RAL
IP Class	44-66

Dimensions



Model	a	b	c
Lora-IP44	40mm	30mm	14mm
Lora-IP66	40mm	30mm	40mm

Options Controls

