LED NEON FLEX · SIDE-BEND SILICONE PROFILE

NEON-1010S

10 × 10 mm cross section · 24 VDC · IP67 · Single colour, tunable white and RGB



CROSS SECTION	10 × 10 mm
INPUT	24 VDC
POWER	10 W/m
PROTECTION	IP67
MAX. RUN	5 m
MIN. CUT	35.7 mm


Overview

NEON-1010S is a compact side-bend silicone LED neon profile with a 10 × 10 mm cross section, designed to follow curves in the horizontal plane. Its one-piece extruded silicone housing is rated IP67 and is built for marine and yacht installations, resisting salt water, UV, acids and alkalis. An optical diffusion structure turns the LEDs into a continuous, dot-free and shadow-free line of light. It is available in single colour, tunable white (DW) and RGB with constant-voltage drive.

Specifications

Model	NEON-1010S
Cross section (W × H)	10 ±0.15 × 10 ±0.15 mm
Bend direction	Side bend (horizontal plane)
Min. bend diameter	100 mm
Standard length	5005 ± 7 mm + 300 ± 15 mm cable
Input voltage	24 VDC
Power	10 W/m
Drive type	CV (constant voltage)
Dimming	PWM
IP rating	IP67
Housing	One-piece extruded silicone, milky white
Colour rendering	CRI 90 (white versions)
Cut length	35.7 mm (single colour) · DW 50 mm · RGB 62.5 mm
Max. run length	5 m
Storage temperature	−25 … +60 °C
LED solder-point temp.	max. 65 °C
Operating temperature	−25 … +45 °C

Cross Section



Cross section

ORDERING INFORMATION

Product Code

NEON-1010S
MODEL

WW
LIGHT COLOUR
See list below

SW 2700K · **WW** 3000K · **NW** 4000K · **W** 6500K · **R** Red · **G** Green · **B** Blue · **DW** Tunable white · **RGB** Example: **NEON-1010S-WW** = 10 W/m, 3000K


Photometric Data

PRODUCT CODE	LIGHT	POWER	DRIVE	LM/M	LM/W	CUT MM	MAX. RUN M	MAX. AMB. °C
NEON-1010S-SW	2700K	10 W/m	CV	570	57.0	35.7	5	45
NEON-1010S-WW	3000K	10 W/m	CV	620	62.0	35.7	5	45
NEON-1010S-NW	4000K	10 W/m	CV	660	66.0	35.7	5	45
NEON-1010S-W	6500K	10 W/m	CV	690	69.0	35.7	5	45
NEON-1010S-R	Red	10 W/m	CV	270	27.0	35.7	5	45
NEON-1010S-G	Green	10 W/m	CV	540	54.0	35.7	5	45
NEON-1010S-B	Blue	10 W/m	CV	130	13.0	35.7	5	45
NEON-1010S-DW	Tunable white	10 W/m	CV	—	—	50	5	45
NEON-1010S-RGB	RGB	10 W/m	CV	—	—	62.5	5	45

lm/m: luminous flux per metre at full output · Max. run: recommended maximum length from a single feed point · Max. amb.: maximum permitted ambient temperature. Photometric data for the DW and RGB versions available on request. Other colour temperatures (2100K–5000K) and fixed colours (yellow, pink) on request.


DIMENSIONS & INSTALLATION

Dimensions (unit: mm)

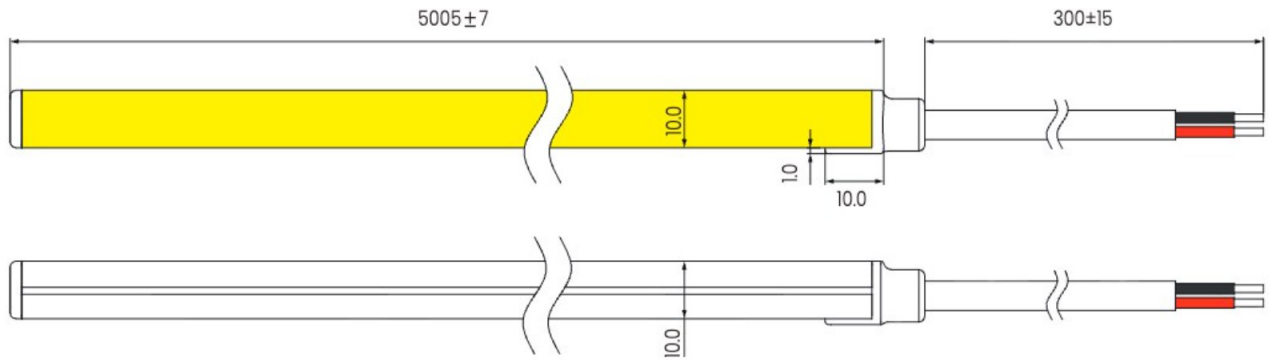


Standard piece: 5005 ± 7 mm neon length with 300 ± 15 mm lead cable. Cross section 10 ±0.15 × 10 ±0.15 mm.

Bending

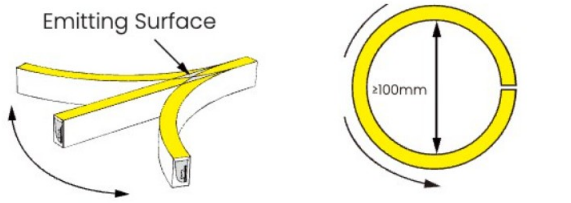

Bends in the horizontal plane only (side bend, emitting surface on top). Minimum bend diameter Ø100 mm.

Light Distribution

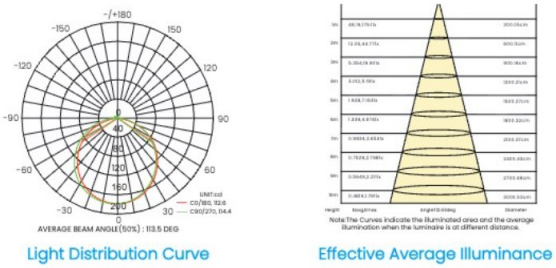

Reference: 24 V, 10 W/m, single colour, 4000K. IES files for other versions on request.

Length Standard

NEON LENGTH L (M)	INTEGRAL END CAP	SILICONE END CAP	TOLERANCE (MM)
0 < L ≤ 5	L + 5	L + 5.5	±7


Final length in mm by end-cap type. Light output and power may vary by up to ±10% due to production and component tolerances.

INSTALLATION GUIDE · LED NEON FLEX

Cable Outlet & Mounting

End caps, cable entry, connectors and mounting accessories for MareLuce silicone neon.

System Overview

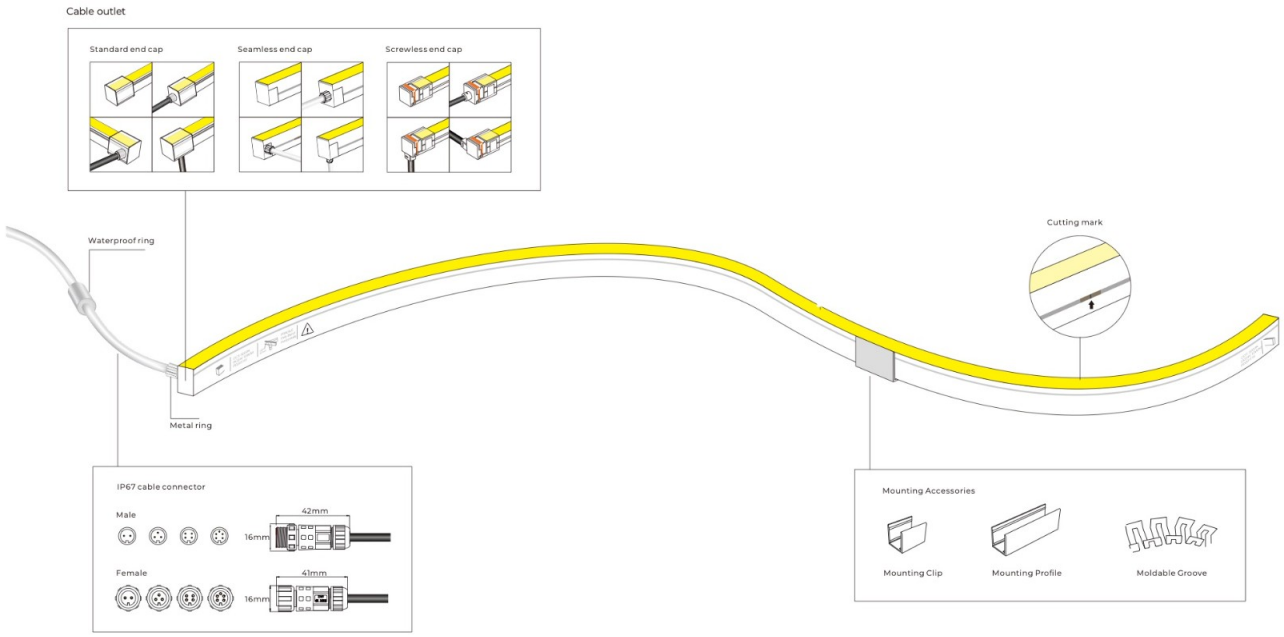


Each piece is supplied sealed: cable outlet at the feed end, closed end cap at the far end. Cut only at the marked cutting points; the maximum run length per feed point is given in the product datasheet.

End Cap Types


TYPE	CONSTRUCTION	BEST FOR
Standard silicone end cap	Moulded silicone cap, IP67 sealed	General use; the default option
Seamless end cap	Light runs to the very end, no dark area	Corners, butted joints and closed shapes
Screwless end cap	Mechanical quick-connect cap with gasket, IP67 (see next page)	On-site cutting and fast replacement

Cable Entry Direction

Silicone End Cap (IP67)




Front Cable Entry



Side Cable Entry



Bottom Cable Entry




Closed end cap

Front: cable exits in line with the neon. **Side:** cable leaves at 90° for runs that end against a wall. **Bottom:** cable passes straight down through the mounting surface for hidden wiring. **Closed end cap:** blind end without cable. Specify end cap and cable entry for each end when ordering; availability varies by model.

INSTALLATION GUIDE · LED NEON FLEX

Screwless End Cap

IP67 screwless end cap deconstruction diagram

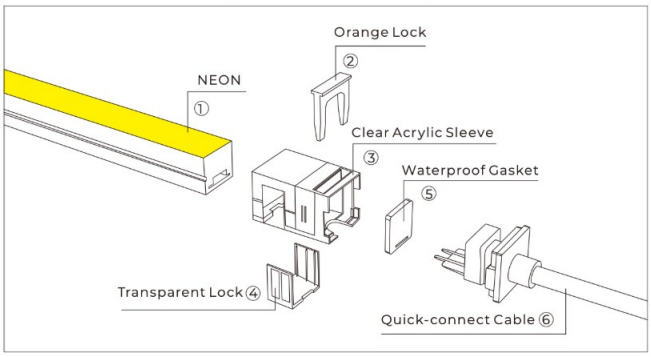


The screwless end cap seals a cut end to IP67 without glue or soldering, so pieces can be cut to length and connected on site.

1. Neon
2. Orange lock
3. Clear acrylic sleeve
4. Transparent lock
5. Waterproof gasket
6. Quick-connect cable


Follow the assembly instructions supplied with the cap.

Joints & Corners


IP67 seamless end cap without dark area



Linear interconnection without dark area



Curve interconnection of lighting outward without dark area



Curve interconnection of lighting outward without dark area



Seamless end caps let two pieces meet without a dark gap, in straight lines and in closed curves. Join pieces with IP67 cable connectors (Ø16 mm, 41–42 mm long, 2 to 5 pins) and place connectors where they stay dry and accessible.

Mounting

ACCESSORY	USE
Mounting clips	Fixed at regular intervals along straight and curved runs; quick to install.
Mounting profile	Aluminium or PC channel for continuous support and a clean, straight line; recommended on exterior and overhead runs.
Moldable groove	Flexible channel that follows curves, letters and logos.
Recessed (wing) neon	Pressed into a routed groove, no profile needed; groove size in the product datasheet.

Installation Notes

- Respect the **bending direction** and **minimum bend diameter** in the product datasheet; do not bend at end caps or cable outlets.
- Do not twist the neon, and never pull or carry it by the cable.
- Cut only at the marked cutting points and reseal every cut end with an end cap to keep the IP rating.
- Use the power supply type and voltage given in the datasheet and do not exceed the maximum run length; feed longer lines from several points.
- On deck and exterior areas keep connections and power supplies protected from standing water; rinse salt deposits with fresh water.
- Switch off the power before installation or maintenance; installation should be carried out by a qualified electrician.

Drawings are for illustration; details may vary by model. Contact MareLuce for project-specific advice.