


MARELUCE
strip & neon

narrow-2



Technical Data	
Power	5Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K-6000K
Luminous Flux	450lm/meter
Light Source	1808 Led / CRI>95
Beam	120°
Dimensions	5000mmx2mmx1,4mm
Chip Density	108Leds/m - 9,25mm pitch
Step LEDs	6LED - 55,5mm


Dimensions - IP Rating



Options Controls




narrow-4



Technical Data	
Power	10Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K-6000K
Luminous Flux	960lm/meter
Light Source	1808 Led / CRI>95
Beam	120°
Dimensions	5000mmx4mmx1,4mm
Chip Density	240Leds/m - 4,2mm pitch
Step LEDs	6LED - 25,0mm

Dimensions - IP Rating



Options Controls




mini-mono



Technical Data	
Power	15Watt / meter
Voltage Supply	5VDC-12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K-6000K
Luminous Flux	1800lm/meter
Light Source	2835 Led / CRI>95
Beam	120°
Dimensions	5000mmx10mmx1,2mm
Chip Density	120Leds/m - 4,15mm pitch
Step LEDs	1LED - 8,3mm

Dimensions - IP Rating



Options Controls




mini-dw



Technical Data	
Power	15Watt / meter
Voltage Supply	5VDC-12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	Dynamic White (2700K-6000K)
Luminous Flux	1800lm/meter
Light Source	2835 Led / CRI>95
Beam	120°
Dimensions	5000mmx10mmx1,2mm
Chip Density	120Leds/m - 8,3mm pitch
Step LEDs	2LED - 16,6mm

Dimensions - IP Rating



Options Controls




narrow-5



Technical Data	
Power	19,2Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K-6000K
Luminous Flux	1800lm/meter
Light Source	2835 Led / CRI>95
Beam	120°
Dimensions	5000mmx5mmx1,2mm
Chip Density	120Leds/m - 8,3mm pitch
Step LEDs	3LED - 25,0mm / 6LED - 50,0mm


Dimensions - IP Rating



Options Controls




mn-860



Technical Data	
Power	12Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K-6000K
Luminous Flux	1200lm/meter
Light Source	5050 Led
Beam	120°
Dimensions	5000mmx10mmx1,4mm
Chip Density	60Leds/m - 16,7mm pitch
Step LEDs	3LED - 50,0mm / 6LED - 100,0mm


Dimensions - IP Rating



Options Controls




mn-10120



Technical Data	
Power	24Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K-6000K
Luminous Flux	2400lm/meter
Light Source	2835 Led / CRI>95
Beam	120°
Dimensions	5000mmx10mmx1,2mm
Chip Density	120Leds/m - 8,3mm pitch
Step LEDs	3LED - 25,0mm / 6LED - 50,0mm


Dimensions - IP Rating



Options Controls




dw-10120



Technical Data	
Power	24Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	Dynamic White (2700K-6000K)
Luminous Flux	2100lm/meter
Light Source	2835 Led / CRI>95
Beam	120°
Dimensions	5000mmx10mmx1,2mm
Chip Density	120Leds/m - 16,7mm pitch
Step LEDs	3LED - 50,0mm / 6LED - 100,0mm


Dimensions - IP Rating



Options Controls




rgb-1030



Technical Data	
Power	7,2Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	RGB
Luminous Flux	320lm/meter
Light Source	5050 Led / CRI>95
Beam	120°
Dimensions	5000mmx10mmx2mm
Chip Density	30Leds/m - 33,3mm pitch
Step LEDs	3LED - 100,0mm / 5LED - 167,0mm


Dimensions - IP Rating



Options Controls



rgb-1060



Technical Data	
Power	14,4Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	RGB
Luminous Flux	640lm/meter
Light Source	5050 Led
Beam	120°
Dimensions	5000mmx10mmx2mm
Chip Density	60Leds/m - 16,7mm pitch
Step LEDs	3LED - 50,0mm / 6LED - 100,0mm

Dimensions - IP Rating


IP20

IP65

Options Controls

120V Controller, DMX512A, DALI Controller, WiFi, Triac Controller, PWM Controller

rgb-6120



Technical Data	
Power	10Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	RGB
Luminous Flux	420lm/meter
Light Source	3838 Led
Beam	120°
Dimensions	5000mmx6mmx2mm
Chip Density	120Leds/m - 8,3mm pitch
Step LEDs	6LED - 50,0mm

Dimensions - IP Rating


IP20

IP65

Options Controls

120V Controller, DMX512A, DALI Controller, WiFi, Triac Controller, PWM Controller

rgbw-1260



Technical Data	
Power	19,2Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	RGB+2700K/3000K/6000K
Luminous Flux	1200lm/meter
Light Source	5050 Led
Beam	120°
Dimensions	5000mmx12mmx2mm
Chip Density	60Leds/m - 16,7mm pitch
Step LEDs	3LED - 50,0mm / 6LED - 100,0mm

Dimensions - IP Rating


IP20

IP65

Options Controls

120V Controller, DMX512A, DALI Controller, WiFi, Triac Controller, PWM Controller

rgbw-1260



Technical Data	
Power	19,2Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	RGB+2700K+6000K
Luminous Flux	1200lm/meter
Light Source	5050 Led
Beam	120°
Dimensions	5000mmx12mmx2mm
Chip Density	60Leds/m - 16,7mm pitch
Step LEDs	6LED - 100,0mm

Dimensions - IP Rating


IP20

IP65

Options Controls

120V Controller, DMX512A, DALI Controller, WiFi, Triac Controller, PWM Controller

rgb-px-1060



Technical Data	
Power	14,4Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / SPI
Color Temp.	RGB
Luminous Flux	540lm/meter
Light Source	5050 Led
Beam	120°
Dimensions	5000mmx10mmx2mm
Chip Density	60Leds/m - 16,54mm pitch
Step LEDs	3LED - 50,0mm / 6LED - 100,0mm

Dimensions - IP Rating


IP20

IP65

Options Controls

SPI Pixel Controller, DMX512A, DALI Controller, WiFi, Triac Controller, PWM Controller

rgbw-px-1060



Technical Data	
Power	19,2Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / SPI
Color Temp.	RGB+2700K/3000K/6000K
Luminous Flux	1100lm/meter
Light Source	5050 Led
Beam	120°
Dimensions	5000mmx10mmx2mm
Chip Density	60Leds/m - 16,54mm pitch
Step LEDs	3LED - 50,0mm / 6LED - 100,0mm

Dimensions - IP Rating


IP20

IP65

Options Controls

SPI Pixel Controller, DMX512A, DALI Controller, WiFi, Triac Controller, PWM Controller

rgb-dmx-1260



Technical Data	
Power	14,4Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / DMX512A
Color Temp.	RGB
Luminous Flux	620lm/meter
Light Source	5050 Led
Beam	120°
Dimensions	5000mmx12mmx2mm
Chip Density	60Leds/m - 16,7mm pitch
Step LEDs	6LED - 100,0mm

Dimensions - IP Rating


IP20

IP65

Options Controls

DMX512A

rgbw-dmx-1560



Technical Data	
Power	19,2Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / DMX512A
Color Temp.	RGB+2700K/3000K/6000K
Luminous Flux	1250lm/meter
Light Source	5050 Led
Beam	120°
Dimensions	5000mmx15mmx2mm
Chip Density	60Leds/m - 16,7mm pitch
Step LEDs	6LED - 100,0mm

Dimensions - IP Rating


IP20

IP65

Options Controls

DMX512A

cob-mn-4



Technical Data	
Power	5Watt / meter
Voltage Supply	12VDC-24VDC
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K-6000K
Luminous Flux	480lm/meter
Light Source	COB Led
Beam	120°
Dimensions	5000mmx4mmx1,8mm
Chip Density	480Leds/m
Step LEDs	25,0mm / 50,0mm

Dimensions - IP Rating

IP20

IP65

Options Controls

120V Controller, DMX512A, DALI Controller, WiFi, Triac Controller, PWM Controller



MINI



Mounting	
C	STEEL CLIP
B	D.S. TAPE

Cover	
	ICB - OPAL
	CLB - TRANS.


S



Mounting	
C	STEEL CLIP
B	D.S. TAPE
A	ALUMIN. CLIP

Cover	
	ICB - OPAL
	CLB - TRANS.
	ICD - OPAL
	CLD - TRANS.
	ICHB - OPAL
	CLHB - TRANS.
	ICK - OPAL
	CLK - TRANS.



M



Mounting	
C	STEEL CLIP
B	D.S. TAPE
A	ALUMIN. CLIP

Cover	
	ICB - OPAL
	CLB - TRANS.
	ICD - OPAL
	CLD - TRANS.
	ICHB - OPAL
	CLHB - TRANS.
	ICK - OPAL
	CLK - TRANS.


L



Mounting	
C	STEEL CLIP

Cover	
	ICB - OPAL
	CLB - TRANS.
	ICD - OPAL
	CLD - TRANS.
	ICHB - OPAL
	CLHB - TRANS.
	ICK - OPAL
	CLK - TRANS.


FS



Mounting	
C	STEEL CLIP
B	D.S. TAPE

Cover	
	ICD - OPAL
	CLD - TRANS.



FM



Mounting	
C	STEEL CLIP
B	D.S. TAPE

Cover	
	ICD - OPAL
	CLD - TRANS.



CS



Mounting	
B	D.S. TAPE
A	ALUMIN. CLIP

Cover	
	ICB - OPAL
	ICD - OPAL


CM



Mounting	
B	D.S. TAPE
A	ALUMIN. CLIP

Cover	
	ICB - OPAL
	ICL - OPAL


DS



Body Color	
RAL	RAL CODE

Cover	
	ICD - OPAL
	CLD - TRANS.


DM



Body Color	
RAL	RAL CODE

Cover	
	ICD - OPAL
	CLD - TRANS.



DL



Body Color	
RAL	RAL CODE

Cover	
	ICD - OPAL
	CLD - TRANS.


DF



Body Color	
RAL	RAL CODE

Cover	
	ICD - OPAL
	CLD - TRANS.

sheet-mono



- 420 LED
- 4 LED SEG.
- 22 W
- 24VDC
- 92lm
- 2700K-6500K
- 120°

- CE
- RoHS
- REACH
- UL
- IP20
- 120°

Technical Data	
Power	11-22-33Watt / sheet (3 model)
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	2700K-3000K-4000K-6500K
Luminous Flux	1012-2024-3036lm/sheet
Light Source	420 Led / CRI>90
Beam	120°
Dimensions	503,5mmx235mmx6,7mm
Chip Density	420Leds/sheet

Dimensions - IP Rating	
IP Rating	IP20

Options **Controls**

- PI3V Controller
- DMX512A
- Dial Controller
- LEDS-WIFI
- FLAMM
- Trac Controller
- PWM Controller

sheet-dw



- 840 LED
- 4 LED SEG.
- 22 W
- 24VDC
- 92lm
- 2700K-6500K
- 120°

- CE
- RoHS
- REACH
- UL
- IP20
- 120°


Technical Data	
Power	22-44-66Watt / sheet (3 model)
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	Dynamic White (2700K - 6500K)
Luminous Flux	2090-5180-6270lm/sheet
Light Source	840 Led / CRI>90
Beam	120°
Dimensions	503,5mmx235mmx6,7mm
Chip Density	840Leds/sheet

Dimensions - IP Rating	
IP Rating	IP20

Options **Controls**

- PI3V Controller
- DMX512A
- Dial Controller
- LEDS-WIFI
- FLAMM
- Trac Controller
- PWM Controller

sheet-rgbw



- 800 LED
- 4 LED SEG.
- 22 W
- 24VDC
- 92lm
- 2700K-6500K
- 120°

- CE
- RoHS
- REACH
- UL
- IP20
- 120°

Technical Data	
Power	11-22-33Watt / sheet (3 model)
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	RGBW
Luminous Flux	151-303-454lm/sheet
Light Source	800 Led / CRI>90
Beam	120°
Dimensions	503,5mmx235mmx6,7mm
Chip Density	800Leds/sheet

Dimensions - IP Rating	
IP Rating	IP20

Options **Controls**

- PI3V Controller
- DMX512A
- Dial Controller
- LEDS-WIFI
- FLAMM
- Trac Controller
- PWM Controller

sheet-px



- 800 LED
- 4 LED SEG.
- 92lm
- 2700K-6500K
- 120°

- CE
- RoHS
- REACH
- UL
- IP20
- 120°


Technical Data	
Power	92Watt / sheet
Voltage Supply	24VDC
Dimmable	Yes / SPI
Color Temp.	RGBW
Luminous Flux	5060lm/sheet
Light Source	800 Led / CRI>90
Beam	120°
Dimensions	503,5mmx235mmx6,7mm
Chip Density	800Leds/sheet

Dimensions - IP Rating	
IP Rating	IP20

Options **Controls**

- SPI Fixed Controller
- DMX512A
- LEDS-WIFI

neon-48s




- 180° BEND
- 4x8 mm
- 24 VDC
- 6 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

- CE
- RoHS
- REACH
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 6Watt / meter	Dimensions 5000mmx4mmx8mm
Voltage Supply 24VDC	Options I10V Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / PWM	Controls
Color Temp. 2700K/3000K/6000K	
Luminous Flux 220lm/meter	
Bend Type Side / Horizontal	
Beam 120°	


neon-612s



- 180° BEND
- 6x12 mm
- 24 VDC
- 10 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 10Watt / meter	Dimensions 5000mmx6mmx12mm
Voltage Supply 24VDC	Options I10V Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / PWM	Controls
Color Temp. SW/WW/NW/R/G/B/DW/RGB	
Luminous Flux 360lm/meter	
Bend Type Side / Horizontal	
Beam 120°	


neon-612s-px

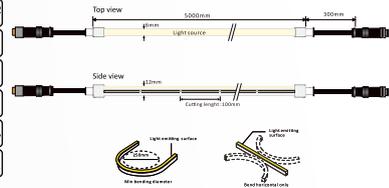

- 180° BEND
- 6x12 mm
- 24 VDC
- 12 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 12Watt / meter	Dimensions 5000mmx6mmx12mm
Voltage Supply 24VDC	Options SPI Fixed Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / SPI	Controls
Color Temp. RGB	
Luminous Flux 160lm/meter	
Bend Type Side / Horizontal	
Beam 120°	

neon-1010s




- 180° BEND
- 10x10 mm
- 24 VDC
- 10 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

- CE
- RoHS
- REACH
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 10Watt / meter	Dimensions 5000mmx10mmx10mm
Voltage Supply 24VDC	Options I10V Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / PWM	Controls
Color Temp. SW/WW/NW/R/G/B/DW/RGB	
Luminous Flux 670lm/meter	
Bend Type Side / Horizontal	
Beam 120°	


neon-1615s



- 180° BEND
- 16x15 mm
- 24 VDC
- 15 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 15Watt / meter	Dimensions 5000mmx16mmx15mm
Voltage Supply 24VDC	Options I10V Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / PWM	Controls
Color Temp. SW/WW/NW/R/G/B/DW/RGB/RGBW	
Luminous Flux 1050lm/meter	
Bend Type Side / Horizontal	
Beam 120°	


neon-2020s

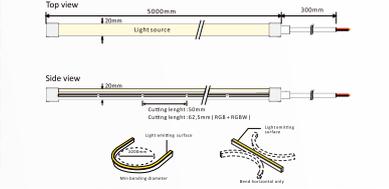

- 180° BEND
- 20x20 mm
- 24 VDC
- 15 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 15Watt / meter	Dimensions 5000mmx20mmx20mm
Voltage Supply 24VDC	Options I10V Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / PWM	Controls
Color Temp. SW/WW/NW/R/G/B/DW/RGB/RGBW	
Luminous Flux 670lm/meter	
Bend Type Side / Horizontal	
Beam 120°	

neon-66t




- 120° BEND
- 6x6 mm
- 24 VDC
- 5 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

- CE
- RoHS
- REACH
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 5Watt / meter	Dimensions 5000mmx6mmx6mm
Voltage Supply 24VDC	Options I10V Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / PWM	Controls
Color Temp. 2700K/3000K/6000K	
Luminous Flux 380lm/meter	
Bend Type Top / Vertical	
Beam 120°	



neon-1010t



- 120° BEND
- 10x10 mm
- 24 VDC
- 10 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 10Watt / meter	Dimensions 5000mmx10mmx10mm
Voltage Supply 24VDC	Options I10V Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / PWM	Controls
Color Temp. 2700K/3000K/6000K	
Luminous Flux 380lm/meter	
Bend Type Top / Vertical	
Beam 120°	


neon-1010t-px

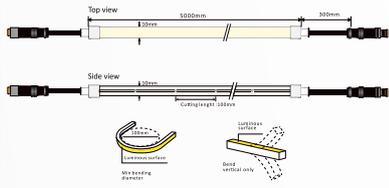

- 120° BEND
- 10x10 mm
- 24 VDC
- 12 Watt
- IP65
- DMX512
- Triac
- PWM
- LED
- CE

Technical Data	Dimensions - IP Rating
Power 12Watt / meter	Dimensions 5000mmx10mmx10mm
Voltage Supply 24VDC	Options SPI Fixed Controller, DMX512, DALI Controller, LEDS WI-FI, Triac Controller, PWM Controller
Dimmable Yes / SPI	Controls
Color Temp. RGB	
Luminous Flux 310lm/meter	
Bend Type Top / Vertical	
Beam 120°	

neon-1615t



- TOP BEND
- 16x15 mm
- 24 VDC
- 15 Watt
- 10 W/m
- IP65
- DMX512
- 1-10V
- TRIAC
- PWM
- LED
- 120°

- CE
- RoHS
- REACH
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS

Technical Data	
Power	15Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	SW/WW/NW/W/R/G/B/DW/RGB/RGBW
Luminous Flux	760lm/meter
Bend Type	Side / Horizontal
Beam	120°
Dimensions	5000mmx16mmx15mm


Dimensions - IP Rating



Options Controls

- 1-10V Controller
- DMX512A
- Dial Controller
- LED10 WH-F1
- FLUAM
- PWM Controller

neon-1615t-dmx

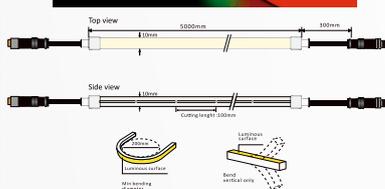

- TOP BEND
- 16x15 mm
- 24 VDC
- 12 Watt
- 10 W/m
- IP65
- DMX512
- 1-10V
- TRIAC
- PWM
- LED
- 120°

- CE
- RoHS
- REACH
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS

Technical Data	
Power	12Watt-15Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / DMX512A
Color Temp.	RGB-RGBW
Luminous Flux	260-310lm/meter
Bend Type	Top / Vertical
Beam	120°
Dimensions	5000mmx16mmx15mm


Dimensions - IP Rating



Options Controls

- DMX512A

wing-0606t



- TOP BEND
- 6x6 mm
- 24 VDC
- 10 Watt
- 10 W/m
- IP65
- DMX512
- 1-10V
- TRIAC
- PWM
- LED
- 120°

- CE
- RoHS
- REACH
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS

Technical Data	
Power	10Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	2700K/3000K/6000K
Luminous Flux	430lm/meter
Bend Type	Top / Vertical
Beam	120°
Dimensions	5000mmx6mmx6mm


Dimensions - IP Rating



Options Controls

- 1-10V Controller
- DMX512A
- Dial Controller
- LED10 WH-F1
- FLUAM
- PWM Controller

wing-1212t



- TOP BEND
- 12x12 mm
- 24 VDC
- 10 Watt
- 10 W/m
- IP65
- DMX512
- 1-10V
- TRIAC
- PWM
- LED
- 120°

- CE
- RoHS
- REACH
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS

Technical Data	
Power	10Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	SW/WW/NW/W/R/G/B/DW/RGB/RGBW
Luminous Flux	510lm/meter
Bend Type	Top / Vertical
Beam	120°
Dimensions	5000mmx12mmx12mm


Dimensions - IP Rating



Options Controls

- 1-10V Controller
- DMX512A
- Dial Controller
- LED10 WH-F1
- FLUAM
- PWM Controller

wing-1615t

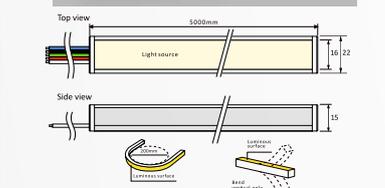

- TOP BEND
- 16x15 mm
- 24 VDC
- 10 Watt
- 10 W/m
- IP65
- DMX512
- 1-10V
- TRIAC
- PWM
- LED
- 120°

- CE
- RoHS
- REACH
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS

Technical Data	
Power	10Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	SW/WW/NW/W/R/G/B/DW/RGB/RGBW
Luminous Flux	620lm/meter
Bend Type	Top / Vertical
Beam	120°
Dimensions	5000mmx16mmx15mm


Dimensions - IP Rating



Options Controls

- 1-10V Controller
- DMX512A
- Dial Controller
- LED10 WH-F1
- FLUAM
- PWM Controller

dual-1615



- TOP BEND
- 16x15 mm
- 24 VDC
- 10 Watt
- 10 W/m
- IP65
- DMX512
- 1-10V
- TRIAC
- PWM
- LED
- 120°

- CE
- RoHS
- REACH
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS

Technical Data	
Power	10Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	SW/WW/NW/W/R/G/B
Luminous Flux	740lm/meter
Bend Type	Side / Horizontal + Top / Vertical
Beam	120°
Dimensions	5000mmx16mmx15mm


Dimensions - IP Rating



Options Controls

- 1-10V Controller
- DMX512A
- Dial Controller
- LED10 WH-F1
- FLUAM
- PWM Controller

dual-1010



- TOP BEND
- 10x10 mm
- 24 VDC
- 10 Watt
- 10 W/m
- IP65
- DMX512
- 1-10V
- TRIAC
- PWM
- LED
- 120°

- CE
- RoHS
- REACH
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS
- UL
- ETL
- CCC
- BSI
- GS

Technical Data	
Power	10Watt / meter
Voltage Supply	24VDC
Dimmable	Yes / PWM
Color Temp.	SW/WW/NW/W/R/G/B
Luminous Flux	510lm/meter
Bend Type	Side / Horizontal + Top / Vertical
Beam	120°
Dimensions	5000mmx10mmx10mm

Dimensions - IP Rating



Options Controls

- 1-10V Controller
- DMX512A
- Dial Controller
- LED10 WH-F1
- FLUAM
- PWM Controller