
DECORATIVE COLLECTION

ALFA-2

Wall-mounted decorative luminaire in SS 316L or aluminium · 12 W · 130° beam

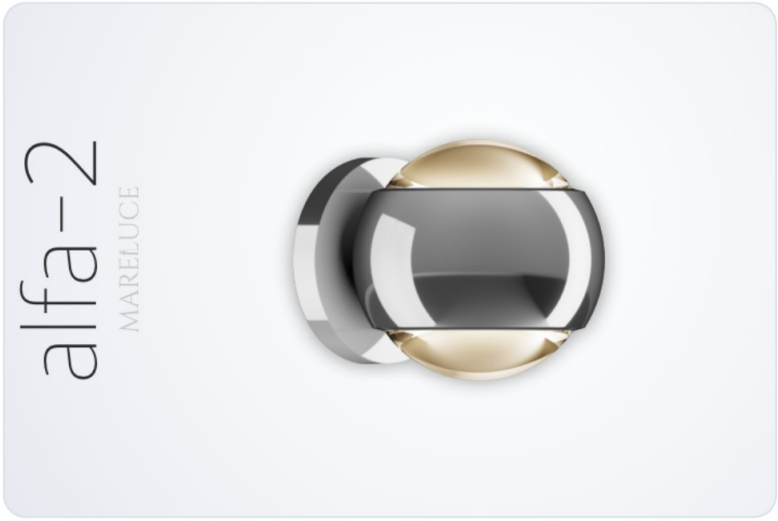

POWER 12 W	EFFICACY 125 lm/W
LIGHT SOURCE LED · CRI 80	BEAM 130°
PROTECTION IP44 – IP66	BODY SS 316L · Al


Overview

ALFA-2 is a wall-mounted decorative luminaire with a body in marine-grade SS 316L stainless steel or aluminium. A high-power LED source with CRI 80 delivers up to 125 lm/W with a 130° beam. It draws 12 W, comes in 2700K, 3000K or 4000K and runs on 18–32 VDC from an external driver. It dims via PWM and can be integrated into 1–10V, DMX512, DALI and Wi-Fi control systems. With IP44 to IP66 protection and ten body finishes, ALFA-2 adds a refined accent to interiors on board.

Specifications

Power	12 W
Supply voltage	18–32 VDC
Driver	External (not included)
Dimming	PWM
Colour temperature	2700K / 3000K / 4000K
Luminous efficacy	125 lm/W (max.)
Light source	High-power LED
Colour rendering	CRI 80
Beam	130°
Body material	SS 316L or aluminium
Body finishes	10 options (see page 2)
IP rating	IP44 – IP66
Operating temperature	–30 °C ... +50 °C
Protection class	III
Installation	Wall mounted

Front View



Compliance

UKCA
UK conformity assessed

CE
European conformity

RoHS
RoHS compliant

Class III
Safety extra-low voltage

F mark
For normally flammable surfaces

–30 °C ... +50 °C
Operating temperature


ORDERING INFORMATION

Product Code

ALFA-2	12	316 · AL	PSS ... G	2700K · 3000K · 4000K
MODEL Decorative	POWER (W)	BODY SS 316L / Aluminium	FINISH See body finishes	CCT

Example: ALFA-2-12-316-MSS-3000K — Alfa-2, 12 W, SS 316L, matt 316L finish, 3000K

Dimensions (mm)

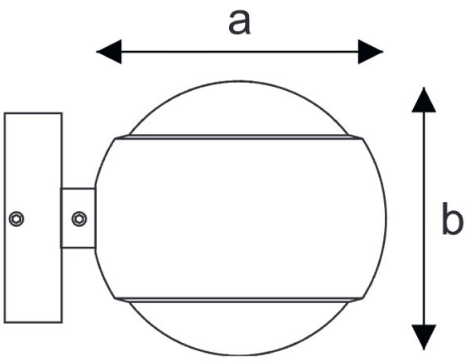

Models

MODEL	CODE	POWER	A	B	C
Alfa-2	ALFA-2-12	12 W	100	100	–

Dimensions as given in the catalogue. All dimensions in mm.

Body Finishes

- **PSS** Polished 316L
- **MSS** Matt 316L
- **SSS** Satine 316L
- **MB** Matt Black
- **MW** Matt White
- **RAL** RAL Code
- **AN** Silver Anodised
- **MBR** Matt Bronze
- **MG** Matt Gold
- **G** Gold

Beam



Colour Temperature

- 2700K Extra warm white
- 3000K Warm white
- 4000K Neutral white

Control Options

1-10V Controller · DMX512A · Dali Controller · LEDIOT WI-FI

- **PWM** — integrated dimming
- **1–10V** — via compatible controller
- **DMX512** — via compatible decoder
- **DALI** — via compatible controller
- **Wi-Fi** — via compatible Wi-Fi controller

Light output and power may vary by up to ±10% due to production and component tolerances. Driver not included; select a driver matching the luminaire power and the 18–32 VDC supply range. IES files available on request.