DOWNLIGHT COLLECTION · RECESSED

CERES-A

Recessed COB downlight in marine-grade SS 316L stainless steel · 3 sizes · 3 beam angles



POWER 3 · 6 · 12 W	EFFICACY 110 lm/W
LIGHT SOURCE COB · CRI 90	BEAM ANGLE 15° · 30° · 60°
PROTECTION IP44 – IP66	BODY SS 316L

Overview

CERES-A is a recessed downlight with a body in marine-grade SS 316L stainless steel. A COB LED source with CRI 90 delivers up to 110 lm/W and is available with 15°, 30° and 60° beam angles. Three sizes — Ceres-a-40, Ceres-a-60 and Ceres-a-80 — provide 3 W, 6 W and 12 W in 2700K, 3000K or 4000K. The luminaire runs on 8–32 VDC with an integrated driver, dims via PWM and can be integrated into 1–10V, DMX512, DALI and Wi-Fi control systems. With IP44 to IP66 protection and ten body finishes, CERES-A fits interior and exterior areas on board.

Specifications

Power	**3 W / 6 W / 12 W (3 models)**
Supply voltage	**8–32 VDC**
Driver	**Integrated**
Dimming	**PWM**
Colour temperature	**2700K / 3000K / 4000K**
Luminous efficacy	**110 lm/W (max.)**
Light source	**COB LED**
Colour rendering	**CRI 90**
Beam	**15° / 30° / 60°**
Body material	**SS 316L stainless steel**
Body finishes	**10 options (see page 2)**
IP rating	**IP44 – IP66**
Operating temperature	**–30 °C … +50 °C**
Protection class	**III**
Installation	**Recessed, spring clips**

Front View



Compliance

UKCA
UK conformity assessed

CE
European conformity

RoHS
RoHS compliant

Class III
Safety extra-low voltage

F mark
For normally flammable surfaces

–30 °C … +50 °C
Operating temperature


ORDERING INFORMATION

Product Code

CEA	40 · 60 · 80	3 · 6 · 12	316	PSS ... G	2700K · 3000K · 4000K	15 · 30 · 60
SERIES CERES-A	SIZE 40 / 60 / 80	POWER (W) Matches size	BODY SS 316L	FINISH See body finishes	CCT	BEAM (°)

Example: CEA-60-6-316-MSS-3000K-30 — Ceres-a-60, 6 W, SS 316L, matt 316L finish, 3000K, 30° beam

Dimensions (mm)

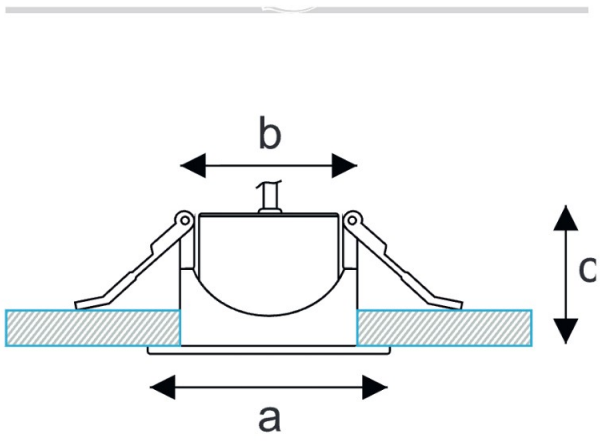

Models

MODEL	CODE	POWER	A	B	C
Ceres-a-40	CEA-40-3	3 W	55	40	45
Ceres-a-60	CEA-60-6	6 W	75	60	50
Ceres-a-80	CEA-80-12	12 W	95	80	65

a: outer trim diameter · b: body diameter · c: overall height. All dimensions in mm.

Body Finishes

- **PSS** Polished 316L
- **MSS** Matt 316L
- **SSS** Satine 316L
- **MB** Matt Black
- **MW** Matt White
- **RAL** RAL Code
- **AN** Silver Anodised
- **MBR** Matt Bronze
- **MG** Matt Gold
- **G** Gold

Beam Angles



Colour Temperature

- 2700K Extra warm white
- 3000K Warm white
- 4000K Neutral white

Control Options



- **PWM** — integrated dimming
- **1–10V** — via compatible controller
- **DMX512** — via compatible decoder
- **DALI** — via compatible controller
- **Wi-Fi** — via compatible Wi-Fi controller

Light output and power may vary by up to ±10% due to production and component tolerances. Driver integrated; supply 8–32 VDC. IES files available on request.