MARINE
PREMIUM LED LIGHT

MARINELED · UNDERWATER LIGHTING

MARIS-6

Underwater light · 18 W single colour / RGB · 24 W RGBW · 90° beam · IP68



MARIS-6 · ANTHRACITE

POWER	LIGHT OUTPUT
18 / 24 W	2250 – 3000 lm
BEAM ANGLE	**PROTECTION**
90°	IP68
SUPPLY	**BODY**
10–30 VDC	Aluminium · SS 316L

OVERVIEW

MARIS-6 is a MarineLed underwater light for installation below the waterline. Its body is available in aluminium (anthracite, silver or bronze anodised) or SS 316L stainless steel with a polished chrome finish, and the optic is protected by a tempered-glass diffuser. Single-colour and RGB versions draw 18 W (2250 lm), the RGBW version 24 W (3000 lm), all with a 90° beam. MARIS-6 is offered in white, green, blue, red, RGB and RGBW, runs on 10–30 VDC from an external driver and can be controlled via Wi-Fi, DMX512, DALI or simple on/off switching. Rated IP68, it is made for continuous submersion.

SPECIFICATIONS

Power	**Single colour, RGB: 18 W · RGBW: 24 W**
Supply voltage	**10–30 VDC**
Driver	**External (not included)**
Light output	**18 W: 2250 lm · 24 W: 3000 lm**
Light colours	**White, green, blue, red, RGB, RGBW**
Beam angle	**90°**
Body material	**Aluminium / SS 316L**
Body finish	**Anthracite, silver, bronze anodised (aluminium) · polished chrome (SS 316L)**
Diffuser	**Tempered glass**
Dimensions	**Ø100 mm × 26 mm**
IP rating	**IP68**
Control	**Wi-Fi, DMX512, DALI, on/off**
Installation	**Below the waterline**

SIDE VIEW



MARIS-6 · Ø100 mm × 26 mm

VERSIONS

Single colour	**18 W**
RGB	**18 W**
RGBW	**24 W**

MARINE
PREMIUM LED LIGHT

ORDERING INFORMATION

PRODUCT CODE

MARIS-6	100	18 · 24	AL · 316	ANT · SIL · BAN · PCH	WH · GR · BL · RD · RGB · RGBW	1030	WIFI · DMX · DALI · ONOFF	90
MODEL	Ø MM	WATT	BODY	FINISH	COLOUR	VDC	CONTROL	BEAM

Example: **MARIS-6-100-24-AL-ANT-RGBW-1030-DMX-90** — MARIS-6, RGBW 24 W, aluminium, anthracite, DMX512 control, 90° beam

MODELS

MODEL	CODE	POWER	LIGHT OUTPUT	Ø	HEIGHT
MARIS-6	MARIS-6-100-18	18 W	2250 lm	100 mm	26 mm
MARIS-6 RGBW	MARIS-6-100-24	24 W	3000 lm	100 mm	26 mm

BODY FINISHES



ANT
Anthracite
Aluminium



SIL
Silver
Aluminium



BAN
Bronze anodised
Aluminium



PCH
Polished chrome
SS 316L

LIGHT COLOURS

White
Single colour

Green
Single colour


Blue
Single colour

Red
Single colour

RGB
Colour changing

RGBW
RGB + white

BEAM ANGLE

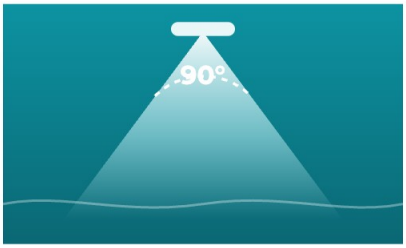

90° · wide beam

CONTROL OPTIONS

Wi-Fi
via app

DMX512
via DMX512 controller

DALI
via DALI controller

On / Off
switched supply

Light output and power may vary by up to ±10% due to production and component tolerances. Driver not included; select a driver matching the luminaire power and the 10–30 VDC supply range.