COURTESY LIGHT COLLECTION

MIRA

Compact courtesy light in SS 316L or aluminium · 2 W · 45° beam · IP44 / IP66 versions



POWER 2 W	EFFICACY 125 lm/W
LIGHT SOURCE LED · CRI 80	BEAM 45°
PROTECTION IP44 – IP66	BODY SS 316L · Al

Overview

MIRA is a compact courtesy light with a body in marine-grade SS 316L stainless steel or aluminium. A high-power LED source with CRI 80 delivers up to 125 lm/W with a 45° beam. It draws 2 W, comes in 2700K, 3000K or 4000K and runs on 3–32 VDC with an integrated driver. It dims via PWM and can be integrated into 1–10V, DMX512, DALI and Wi-Fi control systems. With IP44 to IP66 protection and ten body finishes, MIRA suits steps, walkways and passageways on board.

Specifications

Power	**2 W**
Supply voltage	**3–32 VDC**
Driver	**Integrated**
Dimming	**PWM**
Colour temperature	**2700K / 3000K / 4000K**
Luminous efficacy	**125 lm/W (max.)**
Light source	**High-power LED**
Colour rendering	**CRI 80**
Beam	**45°**
Body material	**SS 316L or aluminium**
Body finishes	**10 options (see page 2)**
IP rating	**IP44 – IP66**
Operating temperature	**–30 °C … +50 °C**
Protection class	**III**
Installation	**Recessed**

Front View



Compliance

UKCA
UK conformity assessed

CE
European conformity

RoHS
RoHS compliant

Class III
Safety extra-low voltage

F mark
For normally flammable surfaces

–30 °C … +50 °C
Operating temperature


ORDERING INFORMATION

Product Code

MIRA	44 · 66	2	316 · AL	PSS ... G	2700K · 3000K · 4000K
MODEL Courtesy Light	IP VERSION IP44 / IP66	POWER (W)	BODY SS 316L / Aluminium	FINISH See body finishes	CCT

Example: MIRA-66-2-316-MSS-3000K — Mira-IP66, 2 W, SS 316L, matt 316L finish, 3000K

Dimensions (mm)

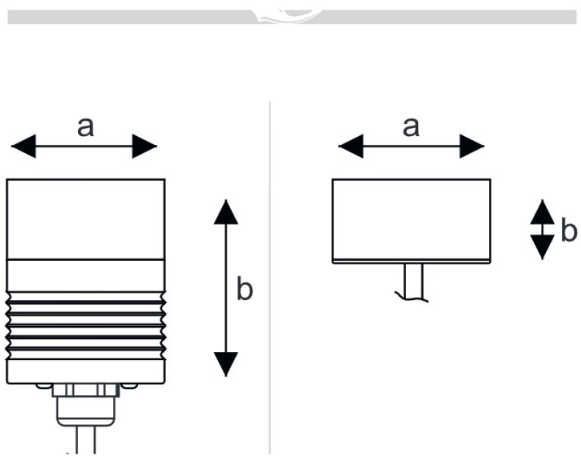

Models

MODEL	CODE	POWER	A	B	C
Mira-IP44	MIRA-44-2	2 W	40	14	–
Mira-IP66	MIRA-66-2	2 W	40	40	–

Dimensions a and b as given in the catalogue. All dimensions in mm.

Body Finishes

- **PSS** Polished 316L
- **MSS** Matt 316L
- **SSS** Satine 316L
- **MB** Matt Black
- **MW** Matt White
- **RAL** RAL Code
- **AN** Silver Anodised
- **MBR** Matt Bronze
- **MG** Matt Gold
- **G** Gold

Beam



Colour Temperature

- 2700K Extra warm white
- 3000K Warm white
- 4000K Neutral white

Control Options



- **PWM** — integrated dimming
- **1–10V** — via compatible controller
- **DMX512** — via compatible decoder
- **DALI** — via compatible controller
- **Wi-Fi** — via compatible Wi-Fi controller

Light output and power may vary by up to ±10% due to production and component tolerances. Driver integrated; supply 3–32 VDC. IES files available on request.