DECORATIVE COLLECTION

NOX-4

Decorative luminaire in aluminium · 6 W · medium beam



POWER 6 W	EFFICACY 125 lm/W
LIGHT SOURCE LED · CRI 80	BEAM Medium
PROTECTION IP44	BODY Aluminium

Overview

NOX-4 is a recessed decorative luminaire with a body in aluminium. A high-power LED source with CRI 80 delivers up to 125 lm/W with a medium beam. It draws 6 W, comes in 2700K, 3000K or 4000K and runs on 12–32 VDC from an external driver. It dims via PWM and can be integrated into 1–10V, DMX512, DALI and Wi-Fi control systems. With IP44 protection and ten body finishes, NOX-4 adds a refined accent to interiors on board.

Specifications

Power	**6 W**
Supply voltage	**12–32 VDC**
Driver	**External (not included)**
Dimming	**PWM**
Colour temperature	**2700K / 3000K / 4000K**
Luminous efficacy	**125 lm/W (max.)**
Light source	**High-power LED**
Colour rendering	**CRI 80**
Beam	**Medium**
Body material	**Aluminium**
Body finishes	**10 options (see page 2)**
IP rating	**IP44**
Operating temperature	**–30 °C … +50 °C**
Protection class	**III**
Installation	**Recessed**

Front View



Compliance

UKCA
UK conformity assessed

CE
European conformity

RoHS
RoHS compliant

Class III
Safety extra-low voltage

F mark
For normally flammable surfaces

–30 °C … +50 °C
Operating temperature


ORDERING INFORMATION

Product Code

NOX-4	6	AL	PSS ... G	2700K · 3000K · 4000K
MODEL Decorative	POWER (W)	BODY Aluminium	FINISH See body finishes	CCT

Example: NOX-4-6-AL-MSS-3000K — Nox-4, 6 W, aluminium, matt 316L finish, 3000K

Dimensions (mm)

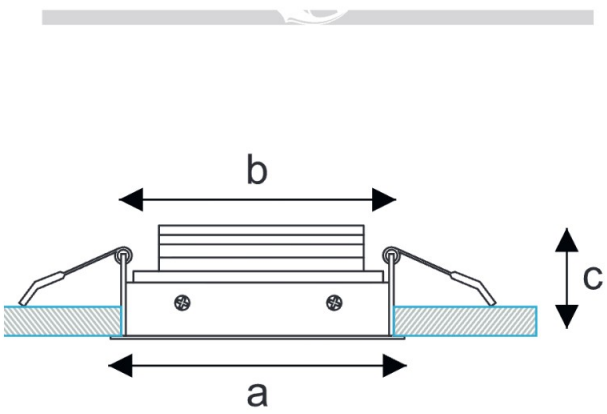

Models

MODEL	CODE	POWER	A	B	C
Nox-4	NOX-4-6	6 W	45 × 125	35 × 115	45

Dimensions as given in the catalogue. All dimensions in mm.

Body Finishes

- **PSS** Polished 316L
- **MSS** Matt 316L
- **SSS** Satine 316L
- **MB** Matt Black
- **MW** Matt White
- **RAL** RAL Code
- **AN** Silver Anodised
- **MBR** Matt Bronze
- **MG** Matt Gold
- **G** Gold

Beam



Colour Temperature

- 2700K Extra warm white
- 3000K Warm white
- 4000K Neutral white

Control Options



- **PWM** — integrated dimming
- **1–10V** — via compatible controller
- **DMX512** — via compatible decoder
- **DALI** — via compatible controller
- **Wi-Fi** — via compatible Wi-Fi controller

Light output and power may vary by up to ±10% due to production and component tolerances. Driver not included; select a driver matching the luminaire power and the 12–32 VDC supply range. IES files available on request.